

Item No.	Size (W x L)
32340	4" x 6" (10.2cm x 15.2cm)
32345	6" x 8" (15.2cm x 20.3cm)
32347	8" x 10" (20.3cm x 25.4cm)
32350	10" x 12" (25.4cm x 30.5cm)
32355	12" x 16" (30.5cm x 40.6cm)
Packaged 50 per package	

FEATURES

- Furnishes superior protection against physical damage
- Offers shielding safeguard from static events
- Three-layer construction
- Zipper closure
- Custom sizes available

SPECIFICATIONS (by layer)

Metalized Aluminum Buried Layer


- Total Thickness: 3.0 mils min.
- Surface Resistivity: Exterior $<10^{12}$ Ohms, per ASTM D-257
Interior $<10^{12}$ Ohms, per ASTM D-257
Metal Layer $<10^{12}$ Ohms, per ASTM D-257
- Static Decay: ± 5 kV Charge to dissipate <50 V in less than 0.1 seconds, per FTMS 101C, M4046
- Triboelectric Charge: Quartz <0.025 , Teflon <-0.200

Amine-Free Anti-Static Bubble

- MIL-B-81705B, Type II
- Surface Resistivity: 10^{10} Ohms, per ASTM D-257-66
- Decay Rate: <2.0 seconds, per FTMS 101C, M4046
- Humidity independent, n-octanoic acid free, no outgassing and no corrosion to polycarbonate boards

Amine-Free Anti-Static Polyethylene

- MIL-B-81705B, Type II
- Surface Resistivity: 10^{10} Ohms, per ASTM D-257-66
- Humidity independent, n-octanoic acid free, no outgassing and no corrosion to polycarbonate boards

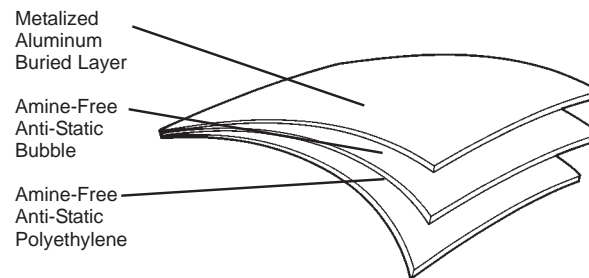

STATIC SHIELDING AIR CELL POUCHES



432 NORTHBORO ROAD CENTRAL
MARLBORO, MA 01752-3170
PHONE (508) 485-7390
FAX (508) 480-0257



Visit our online
library of Tech Drawings:
ESDSYSTEMS.com

DRAWING NUMBER

TD-32340

DATE

8/06